

Fig. 1

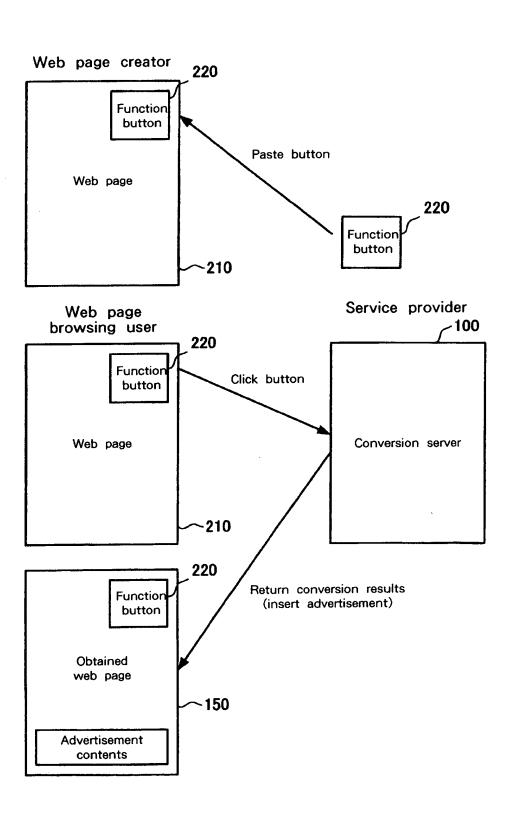


Fig. 2





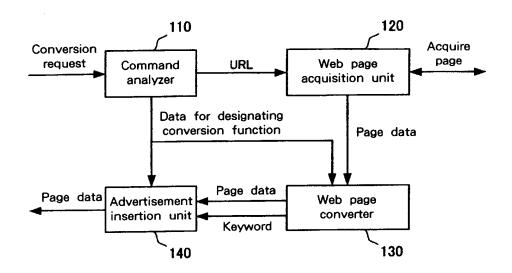


Fig. 3

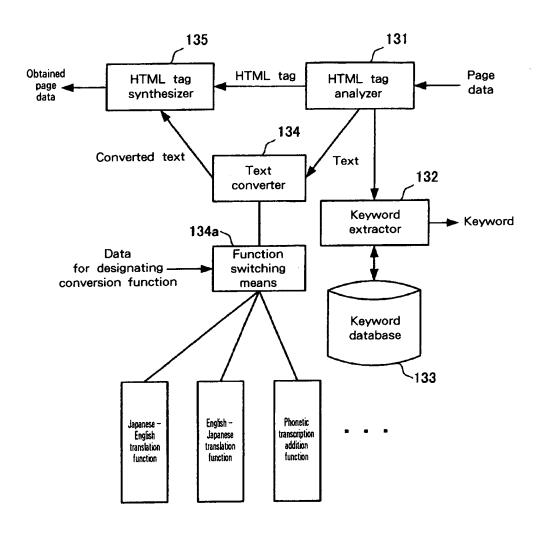

Web page converter

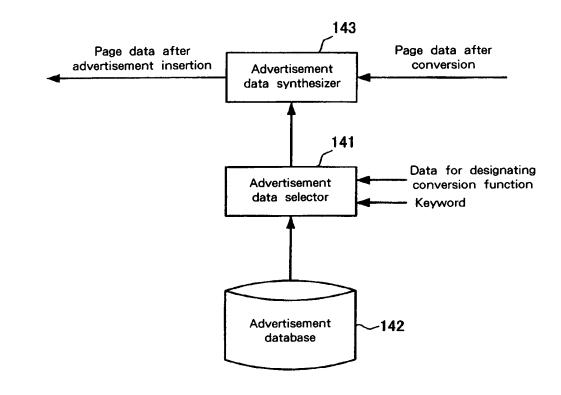

Į,; į

The state of the s

== =

Advertisement insertion unit

The state of the s

Script (example) of conversion request button

```
function GO(){location.href = "http://conversion.ibm.com/cgi-bin/convert?f=ej&u=" + location;}
                                                                                                                                                                                                                                           <A HREF="JavaScript:GO();">[Machine Translation E->J]</A>
<P><SCRIPT language="JavaScript">
                                                                                                                                                                                                   <P align="right">
                                                                                                                                                         </SCRIPT></P>
                                                                                                                        ∂
```

convert is a program (cgi program) name f=ej and u="+location; are descriptions of options (referred to by a program)

http://conversion.ibm.com is a server name

On the third line,

cgi - bin is a directory name


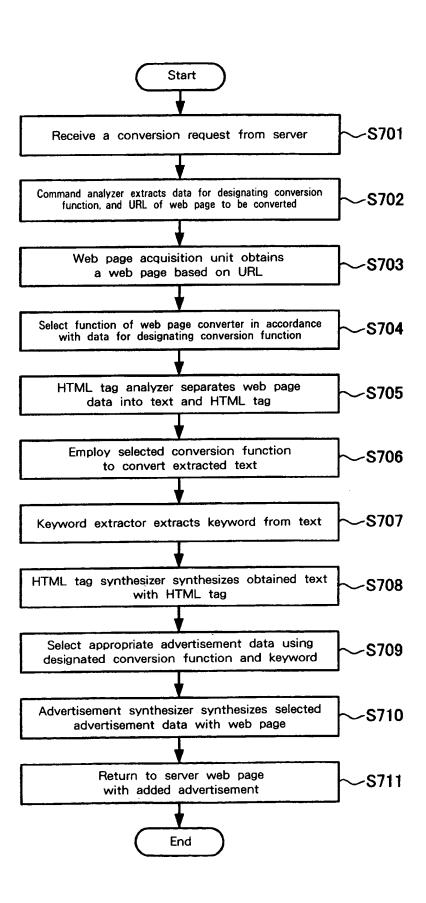


Fig. 7

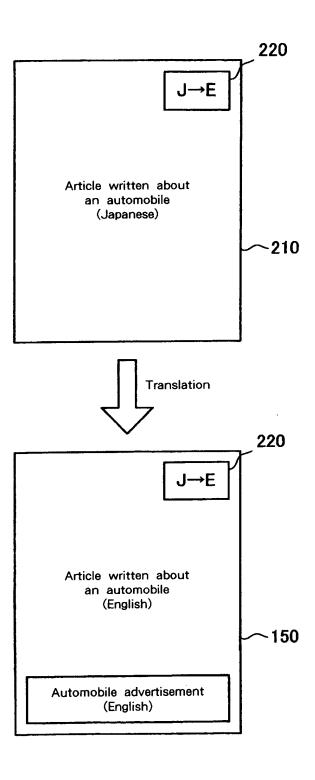

[,]

The state of the s

Fig. 8